


EcoThermo 75

Panel doors for everyone



QUALITY WITHOUT
COMPROMISE



5
YEAR
WARRANTY



MODELS



P50 Crystallus

- Colour RAL 7016
- Handle in stainless steel at a length of 800 mm



P51 Opalus

- Colour RAL 7001
- Milled panel
- Handle in stainless steel at a length of 800 mm



P52 Turcosa

- Colour RAL 9016
- Milled panel
- Handle in stainless steel at a length of 1600 mm



P53 Succinum

- Colour RAL 9016
- Satinato glass
- Handle in stainless steel at a length of 800 mm



P54 Topazium

- Colour RAL 7016
- Satinato glass
- Handle in stainless steel at a length of 1600 mm



P55 Medea

- Colour RAL 7001
- Satinato glass
- Handle in stainless steel at a length of 800 mm



P56 Malachites

- Colour RAL 7016
- Satinato glass
- Handle in stainless steel at a length of 800 mm



P57 Carbunculus

- Colour RAL 7001
- Satinato glass
- Glued stainless steel applications
- Handle in stainless steel at a length of 1600 mm



P58 Amethystus

- Colour RAL 7016
- Satinato glass
- Glued stainless steel applications
- Handle in stainless steel at a length of 1600 mm


DOOR TYPES AND DIMENSIONS



TYPE I

Single panel door

Size restrictions:
Width 800 - 1100 mm
Height 2000 - 2250 mm

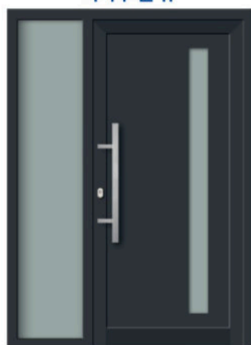

TYPE II

Single panel door with side fanlight in one frame

Size restrictions:
Width 1400 - 2100 mm
(fixed area 300-500 mm,
active area 800-1100 mm)
Height 2000 - 2250 mm



TYPE III

Single panel door with side fanlights in one frame

Size restrictions:
Width 1400 - 2100 mm
(fixed area 300-500mm,
active area 800-1100mm)
Height 2000 - 2250 mm



TYPE IV

Single panel door with upper fanlight in one frame

Size restrictions:
Width 800 - 1100 mm
Height 2000 - 2250 mm


Height of fanlight:
300 - 500 mm

COLOURS | GLAZING


Sample RAL and Tiger colours - structural varnishes




9016



7016




7012




7001




DB 703




7024



7012



7001



6005



5005

Transparent glass




Satinato white



Crepi white



Master Carre white



STANDARD EQUIPMENT AND TECHNICAL CROSS-SECTION ECOTHERMO 75



SYSTEM

- Frame and panel construction width **75 mm**. Doors opening inwards.
- **Plus** series equipped with additional thermal insulation wedges in the frame and sash.
- Low threshold 20mm with thermal separator in anodised colour.

CONSTRUCTION COLOURS

- Five RAL colours as standard. Other colours from the RAL palette and Tiger structural colours are available at an extra charge.

PANELS


- Insert panel 36mm thick. Two models with stick-on stainless steel applications.

GLASS

- Triple glazing with a warm frame with thermal insulation value $U_g = 0,7 \text{ W/m}^2\text{K}$
- Construction: internal transparent glass, inside transparent glass / Satinato white / Crepi white / Master Carre white; external transparent glass


FITTINGS

- 3-point GU-MR2 key-operated strip lock
- inside & outside handle and rosette on separate stainless steel plates
- insert lock with integrated coupling function with 3-keys as standard
- double leaf hinges, 3 hinges on the panel, with the possibility of regulation in 3 levels (3D) in the same colour as the frame.

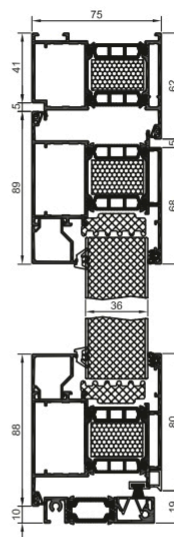

EcoThermo 75 Plus

Insert panel door with insulation
in frame and sash (PLUS)

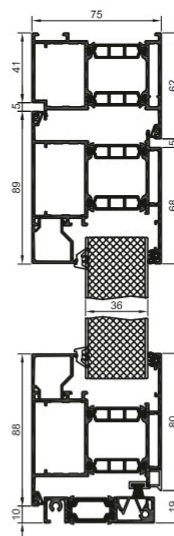

EcoThermo 75

Insert panel door



Business partner